
Rack-and-pinion actuator EA-SZ 24/80/750



Technical Data

Input voltage	24 V DC
Nominal current	1
Running speed	9
IP code	IP55
Switch on duration	20

MOUNTING POSITIONS

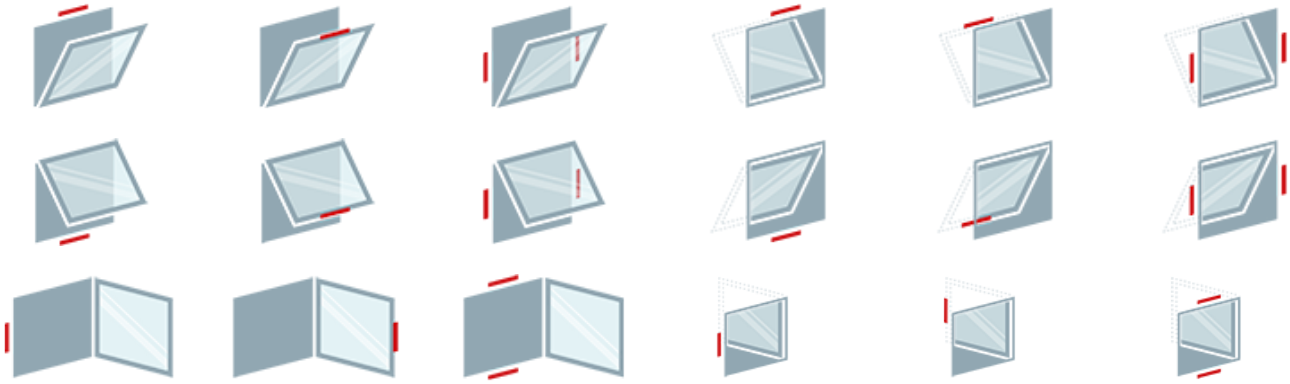

TECHNICAL DATA

Matchcode	EA-SZ 24/80/750
Article name	Rack-and-pinion actuator EA-SZ 24/80/750
Part number	M2 1082
Input voltage	24 V DC
Nominal current	1
Stroke	750
Push force	800
Pull force	800
Cut-Off	integrated electronic overload cut-off and sequence potential
Running speed	9
IP code	IP55
Switch on duration	20
Mounting way	aufgesetzt
Weight	2.9
Housing	Rack housing: anodized aluminum E6 / EV1, gray, motor housing: plastic, stroke + 220 mm x 54 x 120 mm
Housing type	Aluminium
Colour	On request
Housing length	220
Housing width	54
Housing height	120
Connection cable	Silicone cable 3 x 0.75 mm², light gray, length

Rack-and-pinion actuator EA-SZ 24/80/750

	1,500 mm
Nominal working temperature	20
Environment temperature range	-10 °C - 60 °C
Brackets included	ja

ACCESSORIES

Part no.	Matchcode	
M2 1083	EA-SZ-M-350	
M2 1083 A	EA-SZ-VERBIND-1	
M2 1083 B	EA-SZ-VERBIND-2	
M2 1084	EA-SZ-M-550	
M2 1089	EA-SZ-M-750	
M2 1091	EA-SZ-M-1000	