


Technical Data



Input voltage	24 V DC
Nominal current	3.0
Running speed	23
IP code	IP32
Switch on duration	20

MOUNTING POSITIONS

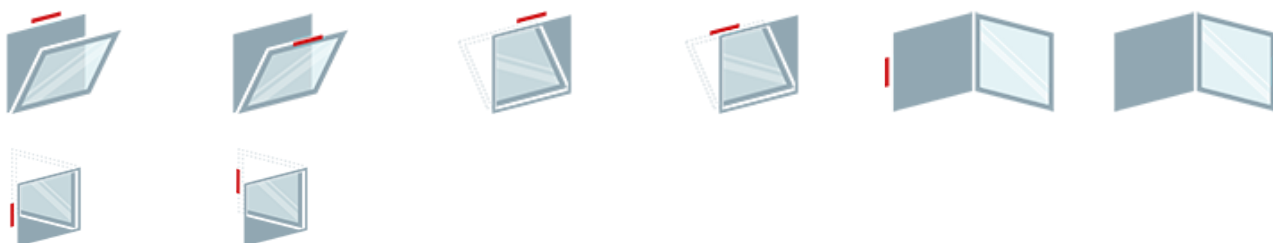

TECHNICAL DATA

Matchcode	EA-K-65/1200-HS
Article name	Chain actuator EA-K-65/1200-HS
Part number	M2 1061
Input voltage	24 V DC
Nominal current	3.0
Input voltage range	- 15 % / + 15 %
Stroke	1200
Push force	650
Pull force	650
Nominal locking force	700
Cut-Off	Integrated electronic overload cut-off
Running speed	23
IP code	IP32
Switch on duration	20
Mounting way	aufgesetzt
Weight	1.96
Housing	Aluminum profile housing EV1 anodized
Housing type	Aluminium
Colour	On request
Housing length	880
Housing width	50
Housing height	41
Appliance class	III
Connection cable	Silicone connection cable Standard 3 x 0.75 mm ² (length 3,000 mm)
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	nein

ACCESSORIES

Part no.	Matchcode	
K2 5088	K-K50-SKI	
K2 5089	K-K50-OK	
K2 5090	K-K50-AKI	
K2 5092	K-K50-A	
K2 5093	K-K50-K	
K2 5094	K-K50-FLEX	
K2 5106	K-K-OK-SK	