
Slit actuator PA-LSA-70/200-S



Technical Data

Input voltage	24 V DC
Nominal current	1.1
Running speed	7.6
IP code	IP54
Switch on duration	30

MOUNTING POSITIONS

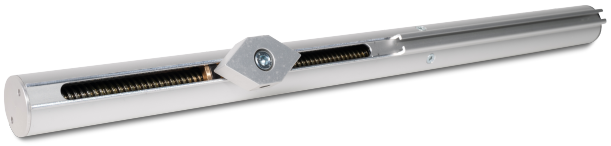

TECHNICAL DATA

Matchcode	PA-LSA-70/200-S
Article name	Slit actuator PA-LSA-70/200-S
Part number	M2 2471 S A
Input voltage	24 V DC
Nominal current	1.1
Networked standby	0.9 W (1 min)
Stroke	181
Push force	700
Pull force	700
Nominal locking force	1000
Cut-Off	integrated electronic overload cut-off
Running speed	7.6
IP code	IP54
Switch on duration	30
Mounting way	aufgesetzt
Weight	1.9
Housing	Aluminium profile tube, anodised E6/EV1 with integrated holder for flexible bracket system
Housing type	Aluminium
Colour	On request
Housing length	535
Housing height	42
Diameter	36
Appliance class	III
Connection cable	SICO PLUG connection. Excluding connection cable / set.
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	ja
Customs tariff no	84798997
Packaging part no.	N-99-188

Slit actuator PA-LSA-70/200-S

ACCESSORIES

Part no.	Matchcode	
K2 1505 A	UKU-740	
K2 1539	HK-L	
K2 1563	K-L-UK-J	
K2 2004	PA-ANL-3m	
K2 2005	PA-ANL-5m	
K2 2006	PA-ANL-+lfm	
K2 2007	PA-SICO-SET-3m	
K2 2008	PA-SICO-SET-5m	
K2 2009	PA-SICO-SET-+lfm	
SD1 8522	SICO-LINK-Adapter	
SD1 8525	SICO-PLUCKER	