

Slit actuator PA-LS-50/750-S

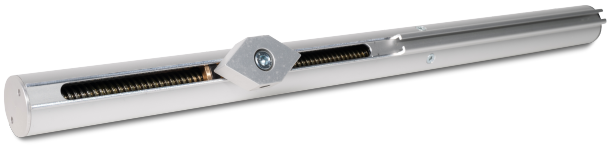

Technical Data

Input voltage	24 V DC
Nominal current	1.0
Running speed	7.7
IP code	IP54
Switch on duration	30

MOUNTING POSITIONS

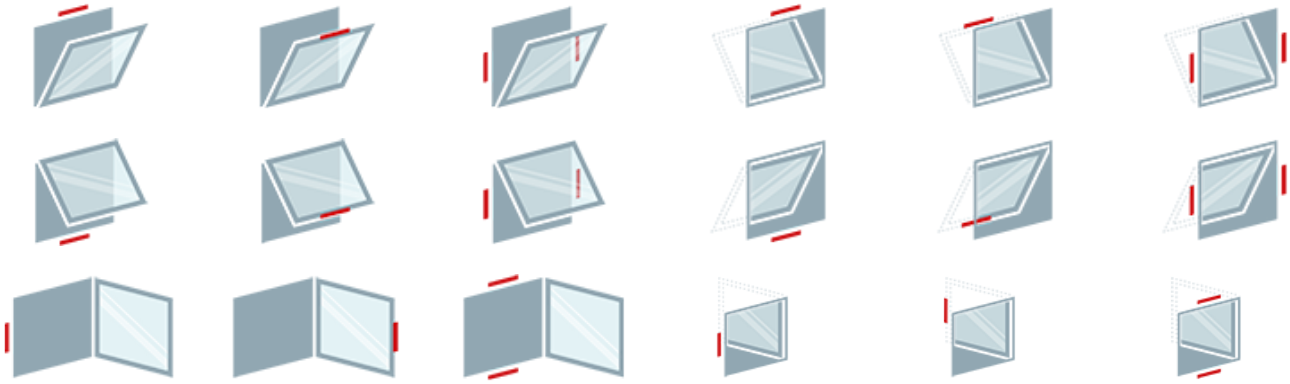

TECHNICAL DATA

Matchcode	PA-LS-50/750-S
Article name	Slit actuator PA-LS-50/750-S
Part number	M2 2464 S
Input voltage	24 V DC
Nominal current	1.0
Input voltage range	- 15 % / + 15 %
Networked standby	0.9 W (1 min)
Stroke	731
Push force	500
Pull force	500
Nominal locking force	1000
Cut-Off	Integrated electronic overload cut-off
Running speed	7.7
IP code	IP54
Switch on duration	30
Mounting way	aufgesetzt
Weight	3.0
Housing	End-to-end aluminium profile tube, anodized in E6/EV1 with integrated retainer for flexible bracket system
Housing type	Aluminium
Colour	On request
Housing length	1100
Housing height	42

Slit actuator PA-LS-50/750-S

Diameter	36
Appliance class	III
Connection cable	SICO PLUG connection. Excluding connection cable / set.
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	nein
Customs tariff no	84798997
Packaging part no.	N-99-145

ACCESSORIES

Part no.	Matchcode	
K2 1501	OK	
K2 1502	DAS	
K2 1505 A	UKU-740	
K2 1539	HK-L	
K2 1562	UK-L	
K2 1563	K-L-UK-J	
K2 2004	PA-ANL-3m	
K2 2005	PA-ANL-5m	
K2 2006	PA-ANL-+lfm	
K2 2007	PA-SICO-SET-3m	
K2 2008	PA-SICO-SET-5m	
K2 2009	PA-SICO-SET-+lfm	
SD1 8522	SICO-LINK-Adapter	
SD1 8525	SICO-PLUCKER	