
Smoke curtain Fire PROtec² - Sa4 C0

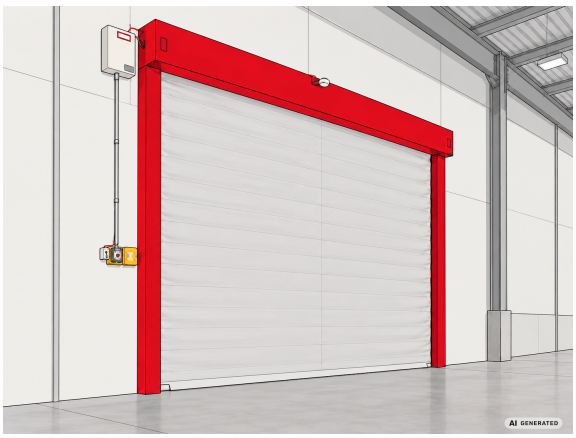

Technical Data

TECHNICAL DATA

Matchcode	FSV2-Sa4-C0
Article name	Smoke curtain Fire PROtec² - Sa4 C0
Part number	FSV2 3005
Classification	CE marking in accordance with EN 16034 with classification Sa4 C0 in accordance with DIN EN 13501-2 (tested to EN 1634-3)
Fabric	Wire-reinforced glass filament fabric with silicone coating on both sides; non-combustible in accordance with A2 by DIN 4102-1.
Unwind	descending by gravity (fail safe)
Rewind	planetary gear drive, 24 V DC, 3 A with electronic overload cut-off; roll shaft-integrated
System installation	Reveal and wall-mounting with appropriate, approved mounting material
System size	max. perimeter (2xW + 2xH) 19.000 mm
Housing	Head box (W x H): Sheet steel 1.5 mm (for roll-up lengths ≤ 3000 mm (W x H): 150 x 182 mm; for roll-up lengths ≥ 3000 mm (W x H): 180 x 212 mm); Side guides (W x H): Sheet steel 2 mm (58 x 95 mm)
Bottom Bar	Steel 2 mm with integrated springs and round steel in fabric bag for gravity fail-safe
Housing type	Steel case
Housing width	150
Housing height	182

ACCESSORIES

Part no.	Matchcode	
A3 2064	RM 3000 FSV	
A3 2167	HE-088-YELLOW-ALU	
A3 2168	HE-088-ORANGE-ALU	
A3 2178	HE 087 Yellow FSV	
A3 4574	CT/NA/Rot	
M2 3360	AM-836	

ST4 3601	PROtec-RZ-24
ST4 3602	PROtec-RZ-24-SB
ST4 3603	PROtec-RZ-24-SB-NA