

Linear actuator PA-L-180/600

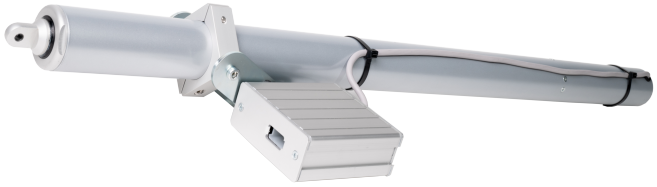

Technical Data

Input voltage	24 V DC
Nominal current	4
Running speed	12.5
IP code	IP54
Switch on duration	30

MOUNTING POSITIONS

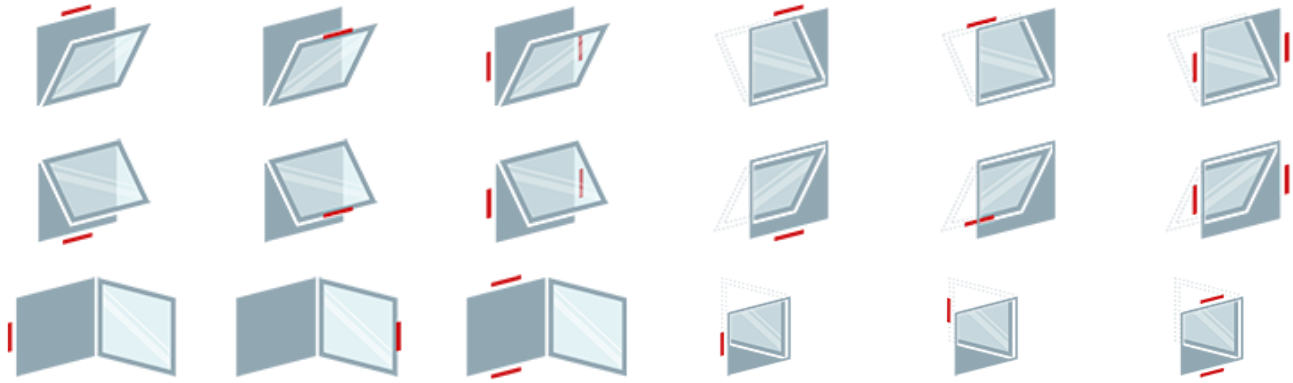

TECHNICAL DATA

Matchcode	PA-L-180/600
Article name	Linear actuator PA-L-180/600
Part number	M2 2443
Input voltage	24 V DC
Nominal current	4
Input voltage range	- 15 % / + 15 %
Networked standby	0.9 W (1 min)
Stroke	600
Push force	1800
Pull force	1800
Nominal locking force	2200
Cut-Off	external electronic overload cut-off
Running speed	12.5
IP code	IP54
Switch on duration	30
Mounting way	aufgesetzt
Weight	6.3
Housing	Aluminium profile tube E6/EV1 anodized, with integrated mount for flexible bracket system, length: 416 mm + stroke
Housing type	Aluminium
Colour	RAL 9006
Housing length	1017
Diameter	58

Linear actuator PA-L-180/600

Appliance class	II
Connection cable	SICO PLUG connection. Excluding connection cable / set.
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	ja
Customs tariff no	84798997
Packaging part no.	N-99-191

ACCESSORIES

Part no.	Matchcode	
K2 1501 B	OK-1500	
K2 1585	K-L-UK-180	
K2 2004	PA-ANL-3m	
K2 2005	PA-ANL-5m	
K2 2006	PA-ANL-+lfm	
K2 2007	PA-SICO-SET-3m	
K2 2008	PA-SICO-SET-5m	
K2 2009	PA-SICO-SET-+lfm	
SD1 8522	SICO-LINK-Adapter	
SD1 8525	SICO-PLUCKER	