
Chain actuator PA-K-50/300-S



Technical Data

Input voltage	24 V DC
Nominal current	1.4
Running speed	11
IP code	IP32
Switch on duration	30

MOUNTING POSITIONS

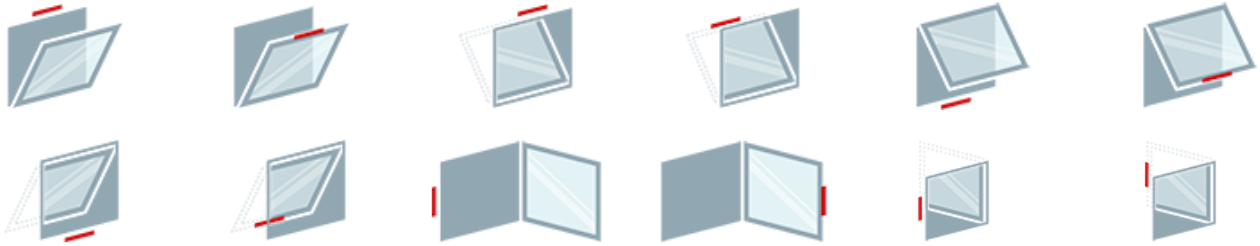

TECHNICAL DATA

Matchcode	PA-K-50/300-S
Article name	Chain actuator PA-K-50/300-S
Part number	M2 2231 S
Input voltage	24 V DC
Nominal current	1.4
Input voltage range	- 15 % / + 15 %
Networked standby	0.9 W (1 min)
Stroke	300
Push force	500
Pull force	500
Nominal locking force	< 3000 N
Cut-Off	Integrated electronic overload cut-off
Running speed	11
IP code	IP32
Switch on duration	30
Mounting way	aufgesetzt
Weight	1.81
Housing	Aluminium profile housing EV1 anodized
Housing type	Aluminium
Colour	On request
Housing length	482
Housing width	50
Housing height	41
Appliance class	III
Connection cable	SICO PLUG connection. Excluding connection cable / set.
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C

Chain actuator PA-K-50/300-S

Brackets included	nein
Customs tariff no	84798997
Packaging part no.	N-99-188

ACCESSORIES

Part no.	Matchcode	
K2 5088	K-K50-SKI	
K2 5089	K-K50-OK	
K2 5090	K-K50-AKI	
K2 5092	K-K50-A	
K2 5093	K-K50-K	
K2 5094	K-K50-FLEX	
K2 5106	K-K-OK-SK	
SD1 8513	SICO-LINK-USB-110	
SD1 8522	SICO-LINK-Adapter	
SD1 8525	SICO-PLUCKER	